


UT600 series digital inductance capacitance meters are used to test resistors, capacitors and inductors. They can also be used to measure transistor parameters. These meters can be used to check electronic components in labs, production lines, maintenance facilities and schools.



UT603

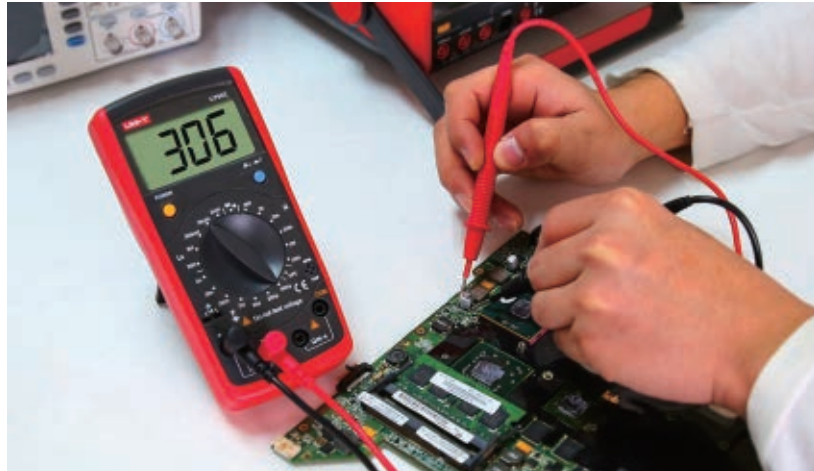

Specifications	Range	UT601	UT603
<b>Certificates</b>	<b>CE, UKCA</b>		
Resistance (Ω)	20Ω/200Ω/2kΩ/20kΩ/200kΩ/2MΩ/20MΩ/200MΩ/2000MΩ 200Ω/2kΩ/20kΩ/200kΩ/2MΩ/20MΩ	±(0.8%+1)	±(0.8%+1)
Capacitance (F)	200pF/2nF/20nF/200nF/2uF/20uF/200uF/2mF/20mF 2nF/20nF/200nF/2uF/20uF/200uF/600uF	±(0.5%+10)	±(1%+5)
Inductance (H)	2mH/20mH/200mH/2H/20H		±(2%+8)
Display count		2000	2000

Features
Manual range
Continuity buzzer
Diode/transistor
Low battery indication

Characteristics	
Standard accessories	Battery, test leads with alligator clips, holster, English manual
Power	9V battery (6F22)
Display	61 x 32 mm
Product size	172 x 83 x 38mm
Product net weight	UT601: 310g, UT603: 312g
Standard individual packing	Gift box
Standard quantity per carton	20pcs
Standard carton measurement	450 x 330 x 340mm (0.099CBM per standard carton)
Standard carton gross weight	9.6kg