
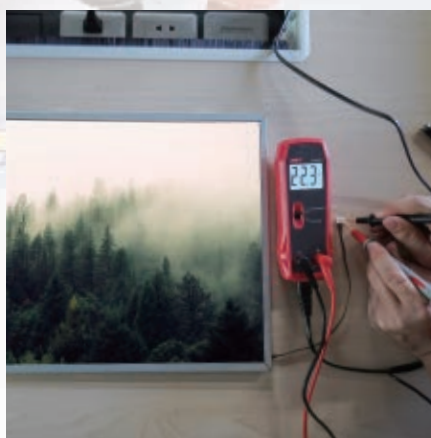


UT659 series products are widely used in single LED test (UT659D), inspection and repair of LCD TV backlight, LED strip light and modulator tube.

UT659A/UT659D LED tester supports full voltage (85V~265V, 50Hz/60Hz) input.

When performing LED tests at 30mA/300V, the polarity can be automatically identified and the output voltage adjusted according to the forward voltage drop of the LED.

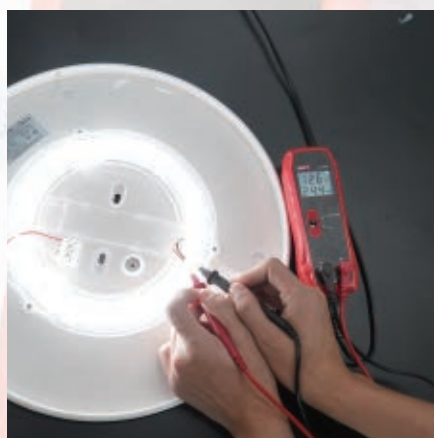

UT659A

Specifications	Description	UT659A	UT659D
Output voltage	24V		√
	300V	√	√
Output current	2mA		√
	30mA	√	√
Continuity	Output voltage: 5V (DC) Measuring resistance: 0~99.9Ω		
Input range	85V to 265V @ 50/60Hz		
Backlight function	Constant on		
Safety protection	High-impedance open circuit		
Operating temperature	0°C~40°C		
Storage temperature	-10°C~50°C		
Relative humidity	<80% RH		
Operating altitude	≤2000m		
Drop protection	1m		
Category ratings	CAT II 300V		

Characteristics	
Standard accessories	Power cable, test leads, English manual
Power	AC 85V~260V, 50Hz/60Hz
Display	60 x 35mm
Product size	150 x 56 x 42mm
Product net weight	175g
Standard individual packing	Gift box, blister
Standard quantity per carton	20pcs
Standard carton measurement	345 x 335 x 245mm
Standard carton gross weight	7.7kg