



Keyword or Item ID



Shopping Cart

English / Deutsch

- Home
- Wholesale
- Shipping Estimator
- Products
- Payment Methods
- Return Policy
- More Information About Us
- Alibaba

See All Categories

Search --All Categories--



Your Shopping Cart

- Digital Multimeter
- Calibrator
- Security Regulation Test
- Thermometer
- Environmental Tester
- Oscilloscope
- Electrical Power Meter
- General Meter
- Others
- Power Supply
- LCR meter

Home > Digital Multimeter > Digital Clamp Meter



VICTOR 606C++ Digital Clamp meter 5999 counts AC/DC 600V 600A Clamp multimeter

Item ID #606C+ **NEW**

List Price: ~~\$80.00~~

Price: **\$72.00**

Quantity: Unit(s)

Add To Cart Add to Wish Lists



- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin



- Ask a Question
- FAQ & Help
- Payment Methods
- Shipping Estimator
- Email To Us
- Print This Page

Recommended Products

VICTOR26 Multifunction Process Calibrator Signal Generator With Accuracy Of 0.01% 5 Digits Display



Only **\$1400.00** [Learn more..](#)

VICTOR26H Multifunction Process Calibrator HARTCommunication With Accuracy 0.01% 5 Digits Display 24



Only **\$1700.00** [Learn more..](#)

VICTOR 01+ Temperature Calibrator Multifunction Process Calibrator 8 Types Thermocouple



Only **\$150.00** [Learn more..](#)

VICTOR 14+ Temperature Calibrator with Measure and Source function 2-wire,3-wire,4-wire ...



Only **\$499.99** [Learn more..](#)

VICTOR 14+ Temperature Calibrator



Only **\$411.99** [Learn more..](#)

Description:

VICTOR 606B+ Digital Clamp meter 5999 counts AC 600V 600A Clamp multimeter

1. SUMMARIZE

This meter is a handheld automatic range digital multimeter which driven by battery. It can be used to measure such parameters as DCV, ACV, DCA and ACA, Resistance, Continuity Buzzer, Diode, Frequency etc.

2. SAFETY OPERATION RULE

The meter's design is in accordance with the CE certification, meets the standard of IEC61010. Read the following before operation.


2-1. Input over range is prohibited in each range during the test.

2-2. Place the function knob to the proper range before measurement, in case damage the meter, do not switch the range during measurement.

2-3. Voltage less than 36V is safety voltage. To avoid electric shock, be careful when measuring voltage higher than 36V DC, 25V AC.


2-4. Don't input voltage under the resistance, capacitance, diode, continuity test, frequency measurement.

VICTOR 25 Multi-function Process Calibrator




Only \$1200.99
[Learn more..](#)

VICTOR 26/26H Multifunction Process Calibrator



Only \$1700.00
[Learn more..](#)

Digital Multimeter VC9801A+



Only \$79.99
[Learn more..](#)

606+ series **New product**

LOW IMPEDANCE CLAMP METER



5999 digit display



35mm jaw size




600A current measurement






Live Chat

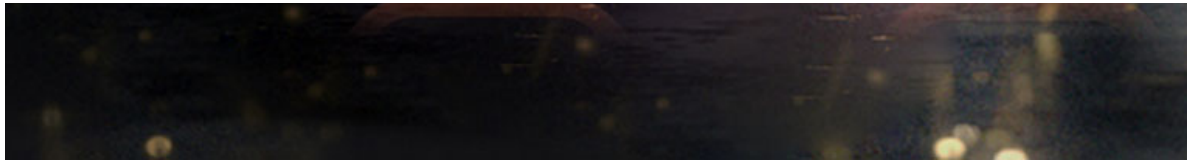- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin














Live Chat ✕

-  Monkey Lin
-  Lin
-  Lin
-  Lin
-  Xia Lin

Technical parameter

Product					
Model	606+	606A+	606B+	606C+	
DCV	200mV/2V/20V	600mV/6V/60V	600mV/6V/60V	600mV/6V/60V	
	200V	600V	600V	600V	
	600V	/	/	/	
ACV	2V/20V	6V/60V	6V/60V	6V/60V	
	200V	600V	600V	600V	±(1.2%+25)
	600V	/	/	/	±(1.5%+25)
Low impedance	2V/20V	6V/60V	6V/60V	6V/60V	±(0.8%+10)
	200V	300V	300V	/	±(1.2%+25)
	ACV	300V	/	/	/
ACA	2A	6A	6A	/	±(4.0%+50)
	20A	60A	60A	/	±(4.0%+35)
	200A/600A	600A	600A	/	±(4.0%+15)
	/	/	/	60A/600A	±(4.0%+10)
DCA	/	/	/	60A/600A	±(4.0%+10)
Resistance	200Ω/2kΩ/20kΩ/	600Ω/6kΩ/60kΩ/	600Ω/6kΩ/60kΩ/	600Ω/6kΩ/60kΩ/	±(1.0%+5)
	200kΩ/2MΩ	600kΩ/6MΩ	600kΩ/6MΩ	600kΩ/6MΩ	
	20MΩ	20MΩ	20MΩ	20MΩ	±(1.5%+15)
	/	60MΩ	60MΩ	60MΩ	±(2.5%+20)
Capacitance	/	6nF	6nF	6nF	±(5.0%+40)
	/	60nF/600nF/6uF 60uF/600uF/6mF	60nF/600nF/6uF 60uF/600uF/6mF	60nF/600nF/6uF 60uF/600uF/6mF	±(5.0%+10)
Frequency	/	10Hz/100Hz/1KHz/ 10kHz/100kHz/ 1MHz/10MHz	10Hz/100Hz/1KHz/ 10kHz/100kHz/ 1MHz/10MHz	10Hz/100Hz/1KHz/ 10kHz/100kHz/ 1MHz/10MHz	±(0.3%+3)
Temperature	/	/	(-20~1000)°C	(-20~1000)°C	/

Live Chat ✕

-  Monkey Lin
-  Lin
-  Lin
-  Lin
-  Xia Lin










Display method	LCD display
Maximum display	5999 count (606+ 1999 count)
Diode measurement	√
Data retention	√
NCV measurement	√
Fire detection	√
Low voltage warning	√
Flashlight lighting	√
True effective value	√
INRUSH	606C+ only
VFC	606C+ only
Max/Min	√
Low Z	√
Working temperature and humidity	(0~40)°C <75%
Storage temperature and humidity	(-10~50)°C <80%
Automatic shut-down	About 15 minutes
Over-range display	The highest digit shows OL
Unit symbol	√
Open jaws	35mm
Input resistance	10MΩ
Sampling rate	3 times/sec
Power supply	2* AAA batteries

Live Chat ✕

- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin

Quality function, quality choice

None is redundant

 Current (606C+AC/DC)	HOLD Data hold	 HD backlight	 Flashlight lighting	TRMS True RMS
 AC and DC voltage	 Capacitance measurement	 On-off beep	 Diode	 Resistance
 Automatic shut-down	NCV Inductive voltage	LIVE Firewire recognition	°C/°F Temperature	Hz Frequency

Live Chat

- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin

Starting current

Inrush current measurement

In the AC gear, long press the ZERO/INR key to select INRUSH surge current measurement to start the device under test, and then the inrush current triggers the meter, and the data results can be read

(Only 606C+ has this function)

Live Chat

- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin



Non-contact voltage

NCV induction measurement

Turn the knob to the NCV gear position, display the "NCV" symbol, the measurable induced voltage The induced voltage range is 48V



Live Chat

- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin

Weak magnetic field signal

The screen displays "--" characters, and the buzzer emits a slow beeping sound

Strong magnetic field signal

The screen displays the character "----", the buzzer makes a rapid beep,

Measure in one folder

600A current measurement

Turn the knob to the current position, press the SELECT key to switch between AC and DC



Live Chat

- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin

Note:
606C+ can measure DC current

Single probe detection

FireWire Recognition Live



When the red test pen detects a strong AC signal, it will display "LIVE", and at the same time the buzzer will emit a quick beep tone, then the test red pen will be in contact with a live wire.

Live Chat

- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin

Single probe detection

FireWire Recognition Live



When the red test pen detects a strong AC signal, it will display "LIVE", and at the same time the buzzer will emit a quick beep tone, then the test red pen will be in contact with a live wire.

Live Chat

- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin

HD display

Large screen backlit LCD

Large screen backlit display, clear handwriting, unit symbol display, easy to understand

VC606+ maximum display 1999
VC606A+/606B+/606C+ maximum display 5999

Live Chat

- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin



35mm jaw

Large jaw design

The jaws of the instrument can be opened to 35mm, and the maximum wire diameter is 25mm



Lighting function

Flashlight lighting without fear of darkness

The jaws of the instrument are illuminated by a flashlight, which is easy to use without fear of the dark environment



Live Chat

- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin

Low impedance

Low impedance AC voltage measurement

Low impedance test capability prevents false readings caused by false voltages

Live Chat

- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin

Low input impedance voltage

It can safely troubleshoot sensitive electronic or control circuits and circuits that may contain false voltages, and can more reliably determine whether there is voltage on the circuit



V.F.C

VFC frequency converter signal

Fast speed and high precision




Live Chat

- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin

Note:
Only 606C+ has
this function

Functional difference

Complete functions, choose as you like

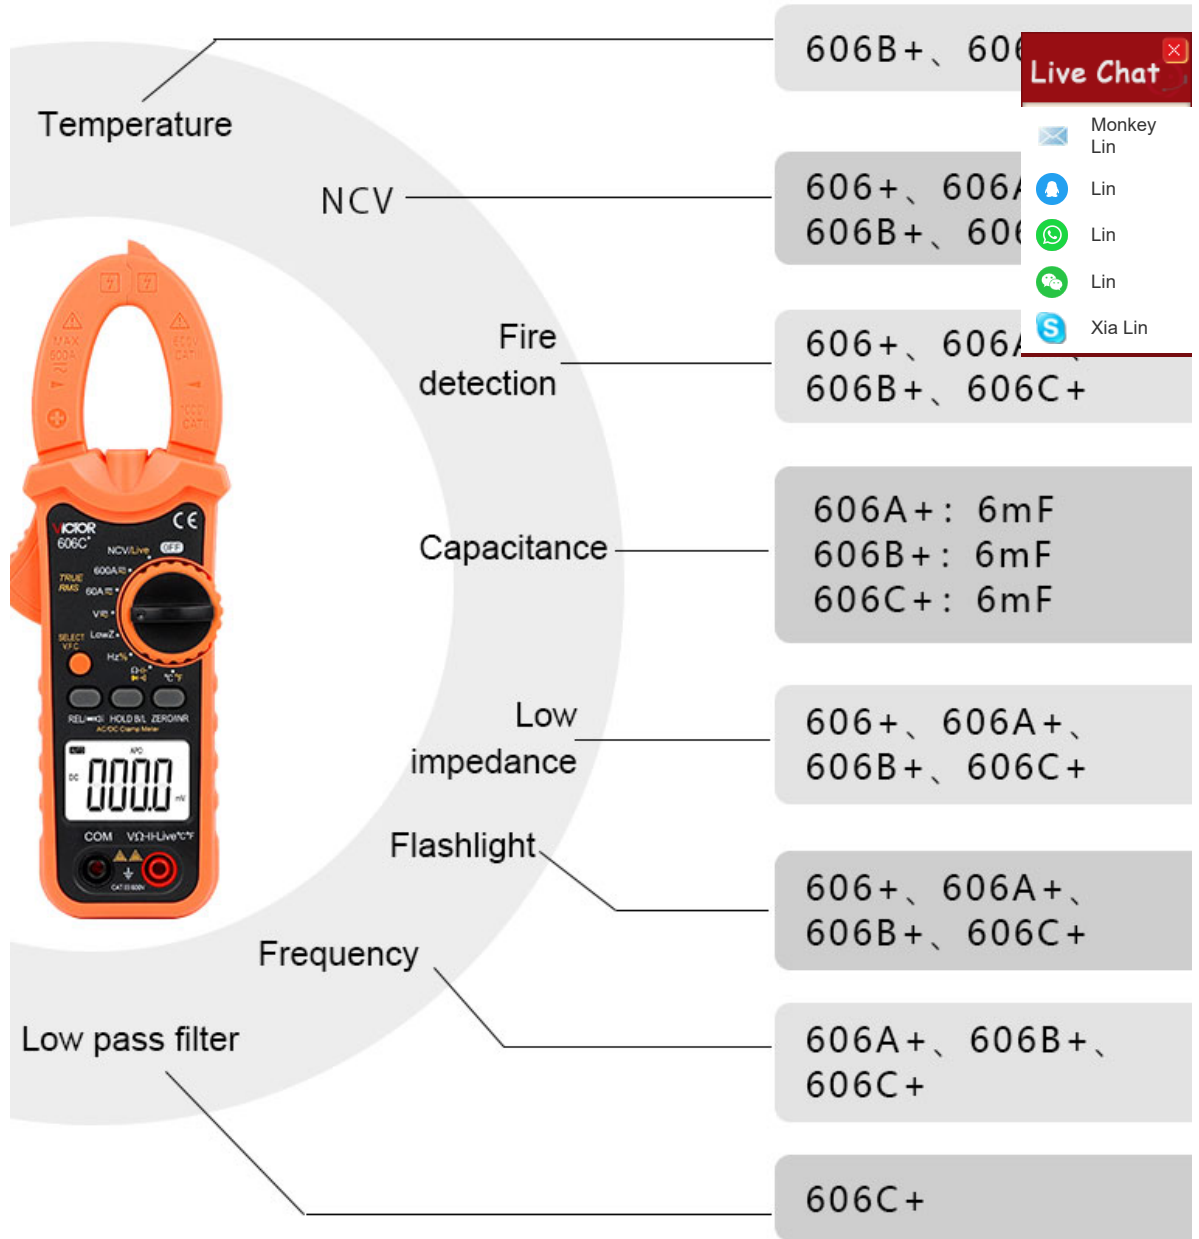

Customer's Reviews: [Write a Review](#)

Write Your Review:

Tell us what you think about this item and share your opinions with other people. Please make sure your review focuses only on this item. All reviews are moderated and will be reviewed within two business days. Inappropriate reviews will not be posted. After-sales service and issues: Contact our Customer Service Department. (A customer representative will get back to you). Please Login first if you want to post or manage reviews uploaded by yourself.



- Monkey Lin
- Lin
- Lin
- Lin
- Xia Lin

Full Name: *

Email Address: *

Rating: *

Review Contents: *

Code Shown: *



[Load new image](#)

[Submit Review](#)

Overview About Victor Quality Assurance Factory Outlook Location & Working Hours	My Account Change account information Create an Account WishList Order Tracking Contact Us	Products & Orders 24*7 Online Service How to Place Order Product inquiry Product Review	Payment Payment Terms Return Policy	Shipping & Costs Shipping Policy Shipping Methods Shipping Cost and Tax
---	--	--	--	---

[About Us](#) | [Contact Us](#) | [Payment Methods](#) | [Sitemap](#) | [FAQ & Help](#)



Copyright © 2010-2014 All Rights Reserved